

ZHEJIANG
J-VALVES
FLUID EQUIPMENT
CO.,LTD.



1/4"~8"
BALL VALVES

FLOATING FLANGE BALL VALVES

BV-01
1PC BALL VALVE THREAD TYPE 1000PSI/2000PSI



- Design Feature**
- Integral Forging
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	A105N/F304/F316
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-02
2PC BALL VALVE THREAD TYPE 2000/3000/6000PSI



- Design Feature**
- Integral Forging
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	A105N/F304/F316
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

FLOATING FLANGE BALL VALVES

BV-11
2PC BALL VALVE FLANGED DIRECT MOUNTING PAD



- Design Feature**
- Investment Casting
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-12
2PC BALL VALVE FLANGED DIRECT MOUNTING PAD



- Design Feature**
- Investment Casting
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-03
2PC FORGED BALL VALVE THREAD TYPE 800LB



- Design Feature**
- Integral Forging
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	A105N/F304/F316
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-04
3PC FORGED BALL VALVE 800/1500/2500LB



- Design Feature**
- Integral Forging
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	A105N/F304/F316
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-13
2PC BALL VALVE FLANGED ANSI DIRECT MOUNTING PAD



- Design Feature**
- Investment Casting
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-14
2PC BALL VALVE FLANGED DIRECT MOUNTING PAD



- Design Feature**
- Investment Casting
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-05
1PC BALL VALVE THREAD TYPE 1000PSI



BV-06
2PC BALL VALVE THREAD TYPE 1000PSI



BV-07
3PC BALL VALVE THREAD TYPE 1000PSI



BV-08
3PC BALL VALVE THREAD TYPE 2000PSI



BV-09
3PC BALL VALVE BW TYPE 1000PSI



BV-10
3WAY BALL VALVE THREAD TYPE 1000PSI



BV-15
3PC BALL VALVE FLANGED DIRECT MOUNTING PAD



- Design Feature**
- Investment Casting
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-16
2PC BALL VALVE FLANGED DIRECT MOUNTING PAD



- Design Feature**
- Investment Casting
 - Blow-Out Proof Stem
 - Anti-Static Device
 - Locking Handle
 - ISO 5211 Direct Mounting PAD
 - API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

**ZHEJIANG
J-VALVES
FLUID EQUIPMENT
CO.,LTD.**



**CAST STEEL
BALL VALVES**



**FORGED STEEL
BALL VALVES**

FLOATING FLANGE BALL VALVES

BV-17

2PC CAST STEEL FLANGE FLOATING BALL VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-18

2PC CAST STEEL FLANGE TRUNNION BALL VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	2"~24"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~900Lb

FLOATING FLANGE BALL VALVES

BV-23

3PC FORGED STEEL TRUNNION BALL VALVE BW



Design Feature

- Integral Forging
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	2"~48"	Body	A105N/F304/F316
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-24

FULLY WELDED BALL VALVE BW



Design Feature

- Investment Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-19

3PC CAST STEEL FLANGE TRUNNION BALL VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	8"~48"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~900Lb

BV-20

METAL SEAL FLANGE BALL VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-25

DBB BALL VALVE FLANGE



Design Feature

- Integral Forging
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~10"	Body	A105N/F304/F316
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-26

SBB BALL VALVE FLANGE



Design Feature

- Integral Forging
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~10"	Body	A105N/F304/F316
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-21

FORGED STEEL FLANGE BALL VALVE



Design Feature

- Integral Forging
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~10"	Body	A105N/F304/F316
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PEEK
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~2500Lb

BV-22

3PC FORGED STEEL FLANGE TRUNNION BALL VALVE



Design Feature

- Integral Forging
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	2"~48"	Body	A105N/F304/F316
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PEEK
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~2500Lb

BV-27

INTEGRATED THERMAL INSULATION BALL VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- Constant Temperature

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-28

FLUORINE-LINED FLANGE BALL VALVE




Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- Highly Corrosive Medium

Size	1/2"~10"	Body	WCB/CF8/CF8M+LINED
Desig	API608/API6D	Ball	SS304/SS316+LINED
Flange	ASME B16.5	Stem	SS304/SS316+LINED
Face to Face	ASME B16.10	Seat	PTFE/PFA
Testing	API598	W.T	-27~150℃
Remarks		W.P	150LB

**ZHEJIANG
J-VALVES
FLUID EQUIPMENT
CO.,LTD.**

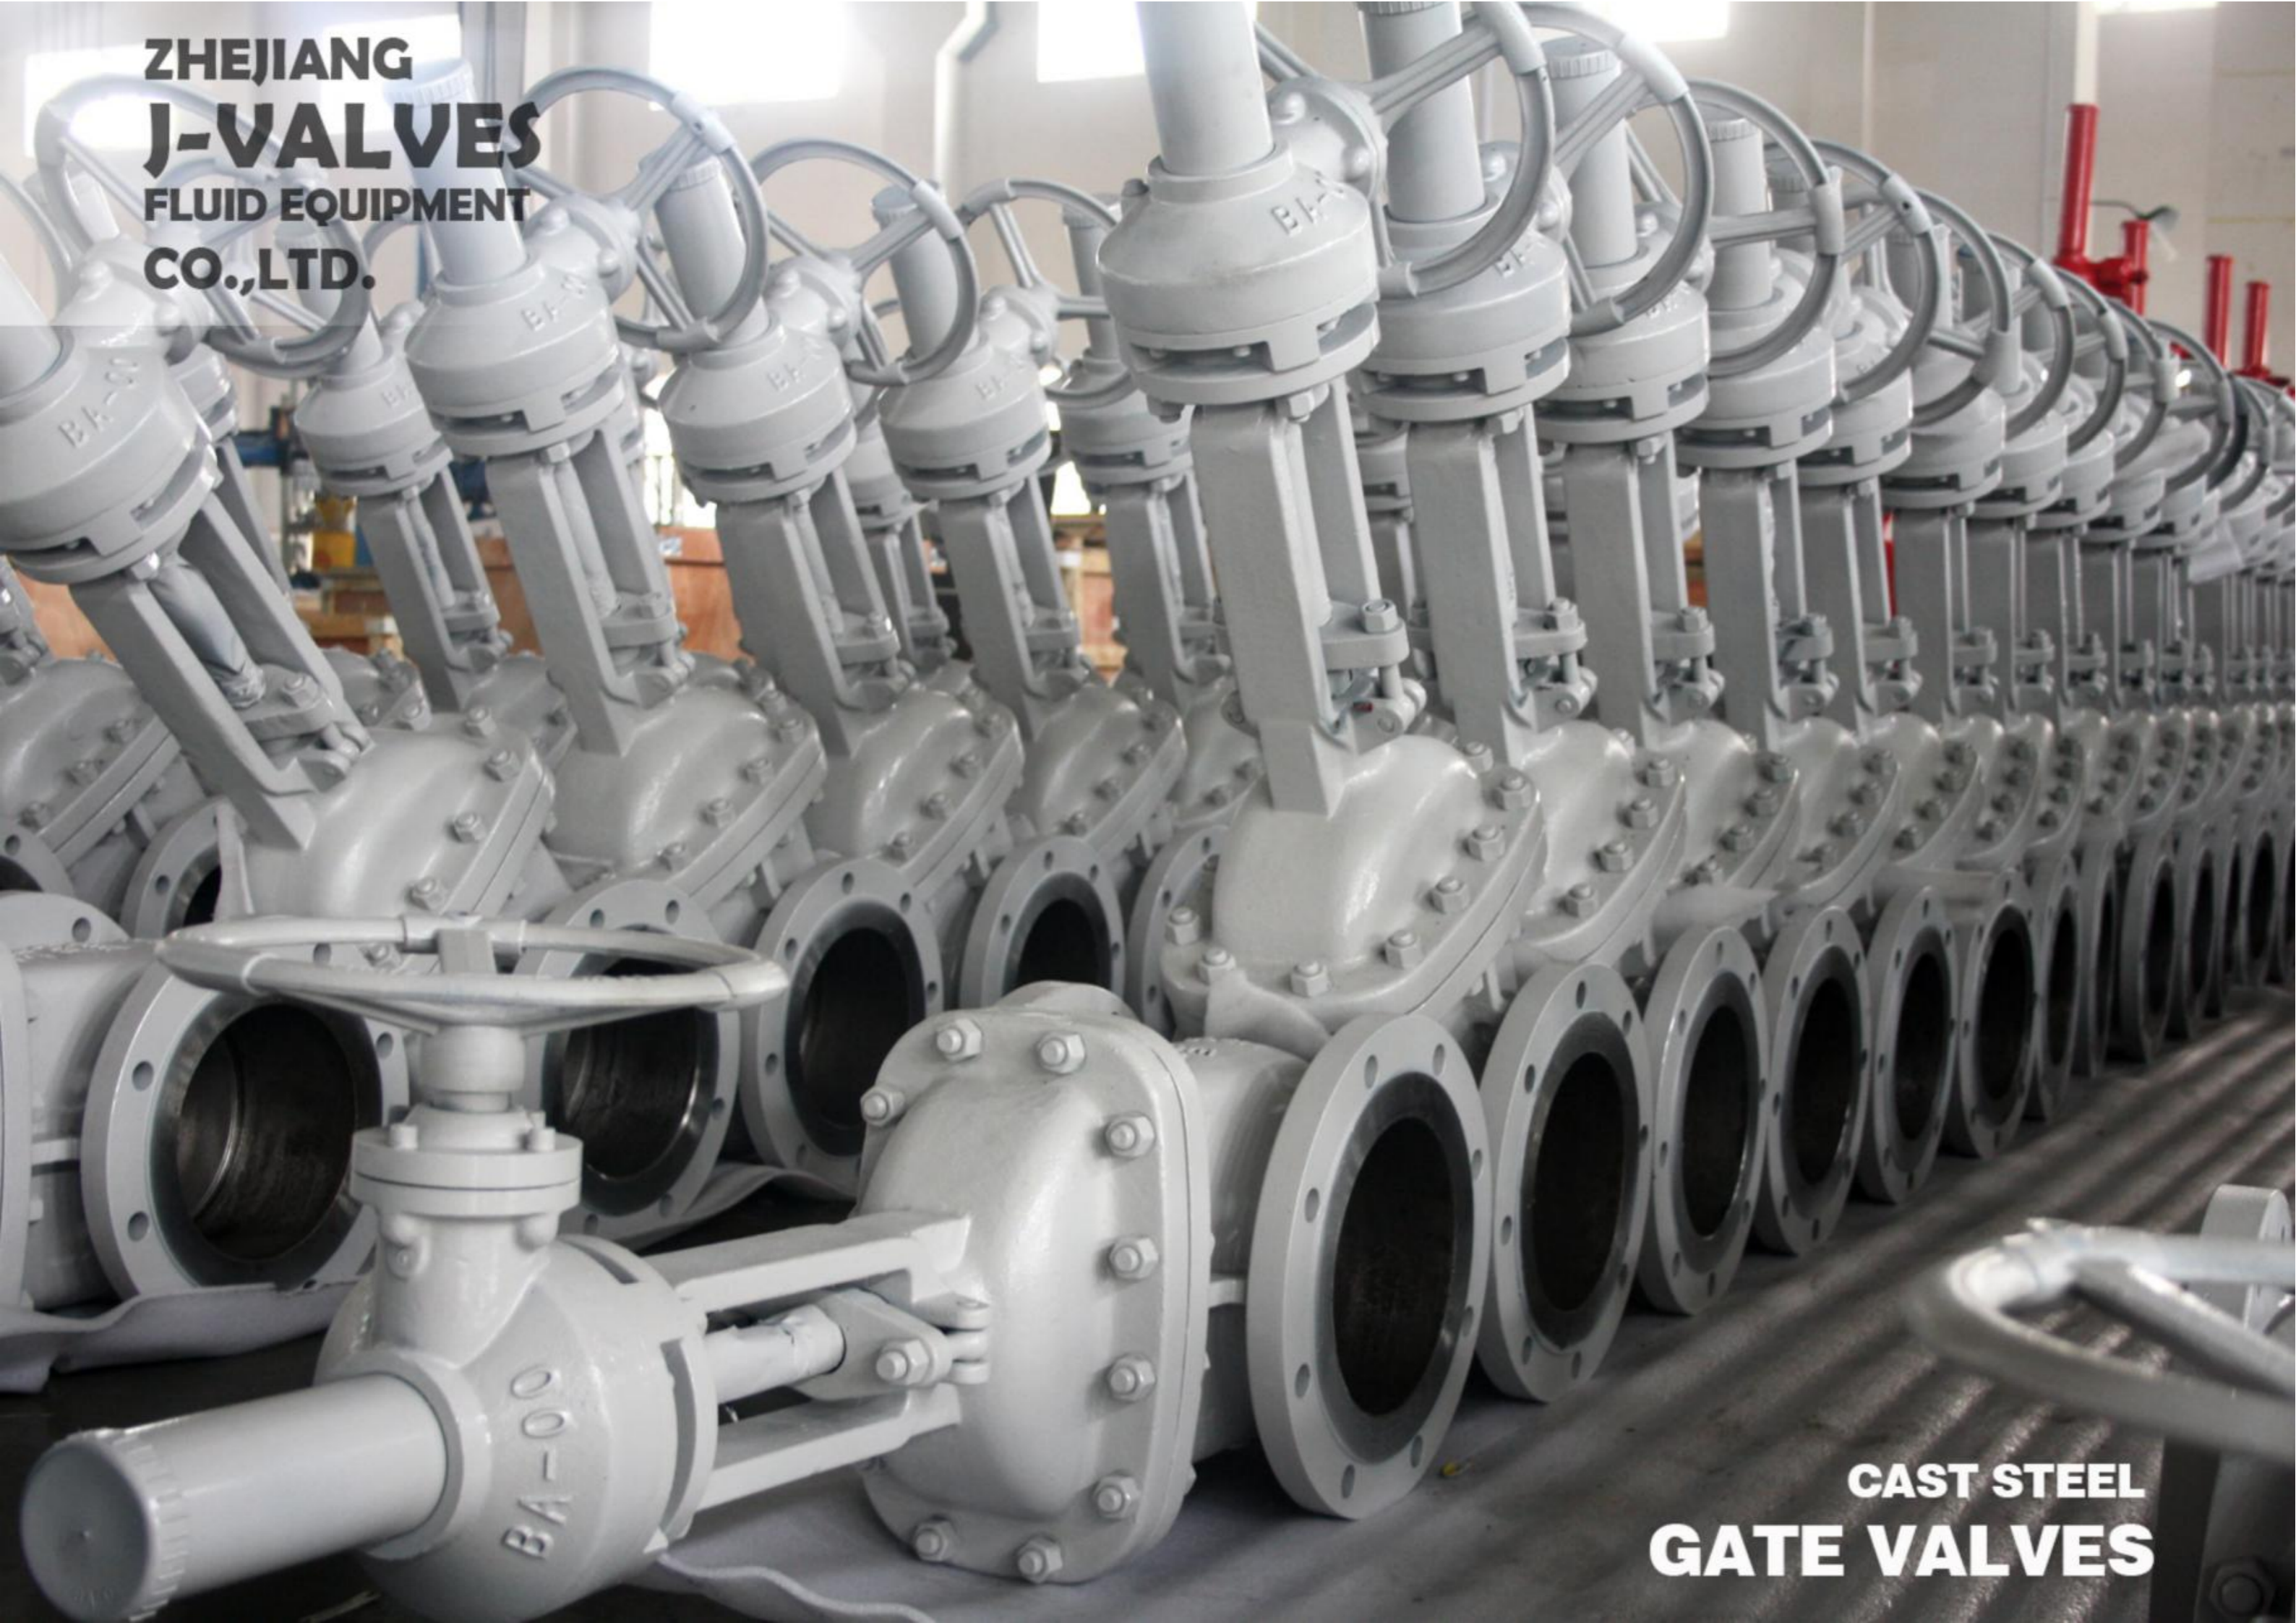

**CAST STEEL
GATE VALVES**

CAST STEEL GATE VALVE

GV-01

API600 FLANGE GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API600/ASME B16.34	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GV-02

JIS FLANGE GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API600/ASME B16.34	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	10K~250K

CAST STEEL GATE VALVE

GV-07

API 600 BELLOWS GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Bellows Design
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API600/ASME B16.34	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GV-08

DIN BELLOWS GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Bellows Design
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API600/ASME B16.34	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GV-03

DIN FLANGE GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API600/ASME B16.34	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GV-04

GOST FLANGE GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API600/ASME B16.34	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GV-09

PRESSURE SEALED BW TYPE GATE VALVE



Design Feature

- Sand casting
- Rising Stem
- Flexible Disc
- Full Bore
- Pressure Seal
- API6FA Fire Safe

Size	2"~24"	Body	WCB/CF8/CF8M
Desig	API600/ASME B16.34	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900Lb~2500Lb

GV-10

PRESSURE SEALED FLANGE GATE VALVE



Design Feature

- Sand casting
- Rising Stem
- Flexible Disc
- Full Bore
- Pressure Seal
- API6FA Fire Safe

Size	2"~24"	Body	WCB/CF8/CF8M
Desig	API600/ASME B16.34	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900Lb~2500Lb

GV-05

API603 STAINLESS STEEL FLANGE GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	CF8/CF8M/CF3M
Desig	API603	Disc	CF8/CF8M/CF3M
Flange	ASME B16.5	Stem	F304/F316/F316L
Face to Face	ASME B16.10	Seat	SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~300Lb

GV-06

BW GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API600/ASME B16.34	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GV-11

API6D SINGLE DISC PLATE GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Renewable Seat
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GV-12

API6D DOUBLE DISC PLATE GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Renewable Seat
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

**ZHEJIANG
J-VALVES
FLUID EQUIPMENT
CO.,LTD.**



**CAST STEEL
GLOBE VALVES**

CAST STEEL GLOBE VALVE

GL01

ANSI CAST STEEL FLANGE GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-02

JIS CAST STEEL FALNGE GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CAST STEEL GLOBE VALVE

GL-07

CASTE STEEL ANGLE FLANGE GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-08

CASTE STEEL ANGLE BELLOWS FLANGE GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-03

DIN CAST STEEL FLANGE GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-04

GOST CAST STEEL FLANGE GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-09

CAST STEEL Y TYPE GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-10

CAST STEEL BW TYPE GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-05

ASNI CAST STEEL BELLOWS GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-06

DIN CAST STEEL BELLOWS GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-11

PRESSURE SEAL FLANGE GLOBE VALVE



Design Feature

- Sand casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Pressure Seal
- API6FA Fire Safe

Size	2"~24"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900Lb~1500Lb

GL-12

PRESSURE SEAL BW TYPE GLOBE VALVE



Design Feature

- Sand casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Pressure Seal
- API6FA Fire Safe

Size	2"~24"	Body	WCB/CF8/CF8M
Desig	API623	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900Lb~1500Lb

**ZHEJIANG
J-VALVES
FLUID EQUIPMENT
CO.,LTD.**



**CAST STEEL
CHECK VALVES**

CAST STEEL CHECK VALVE

CV-01

ANSI CAST STEEL SWING CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-02

ANSI CAST STEEL LIFT CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Piston Or Spring
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

FLOATING FLANGE BALL VALVES

CV-07

AXIAL FLOW CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Spring Seal
- Reduced Bore
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-08

CAST STEEL FLANGE FOOT VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Piston Or Spring
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-03

DIN CAST STEEL FALNGE SWING CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-04

DIN CAST STEEL LIFT FALNGE CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Piston Or Spring
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-09

DOUBLE FLAP WAFER CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Spring Seal
- Integral Body
- Can Choose Soft Seal

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-10

LUG DOUBLE FLAP WAFER CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Spring Seal
- Integral Body
- Can Choose Soft Seal

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-05

JIS CAST STEEL FLANGE SWING CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-06

GOST CAST STEEL FLANGE SWING CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-11

PRESSURE SEAL FLANGE CHECK VALVE



Design Feature

- Sand casting
- Unidirectional Flow
- Prevent Backflow
- Swing Or Lift
- Pressure Seal
- API6FA Fire Safe

Size	2"~24"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900Lb~2500Lb

CV-12

PRESSURE SEAL BW CHECK VALVE




Design Feature

- Sand casting
- Unidirectional Flow
- Prevent Backflow
- Swing Or Lift
- Pressure Seal
- API6FA Fire Safe

Size	2"~24"	Body	WCB/CF8/CF8M
Desig	API6D/API594	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Trim	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900Lb~2500Lb

**ZHEJIANG
J-VALVES
FLUID EQUIPMENT
CO.,LTD.**

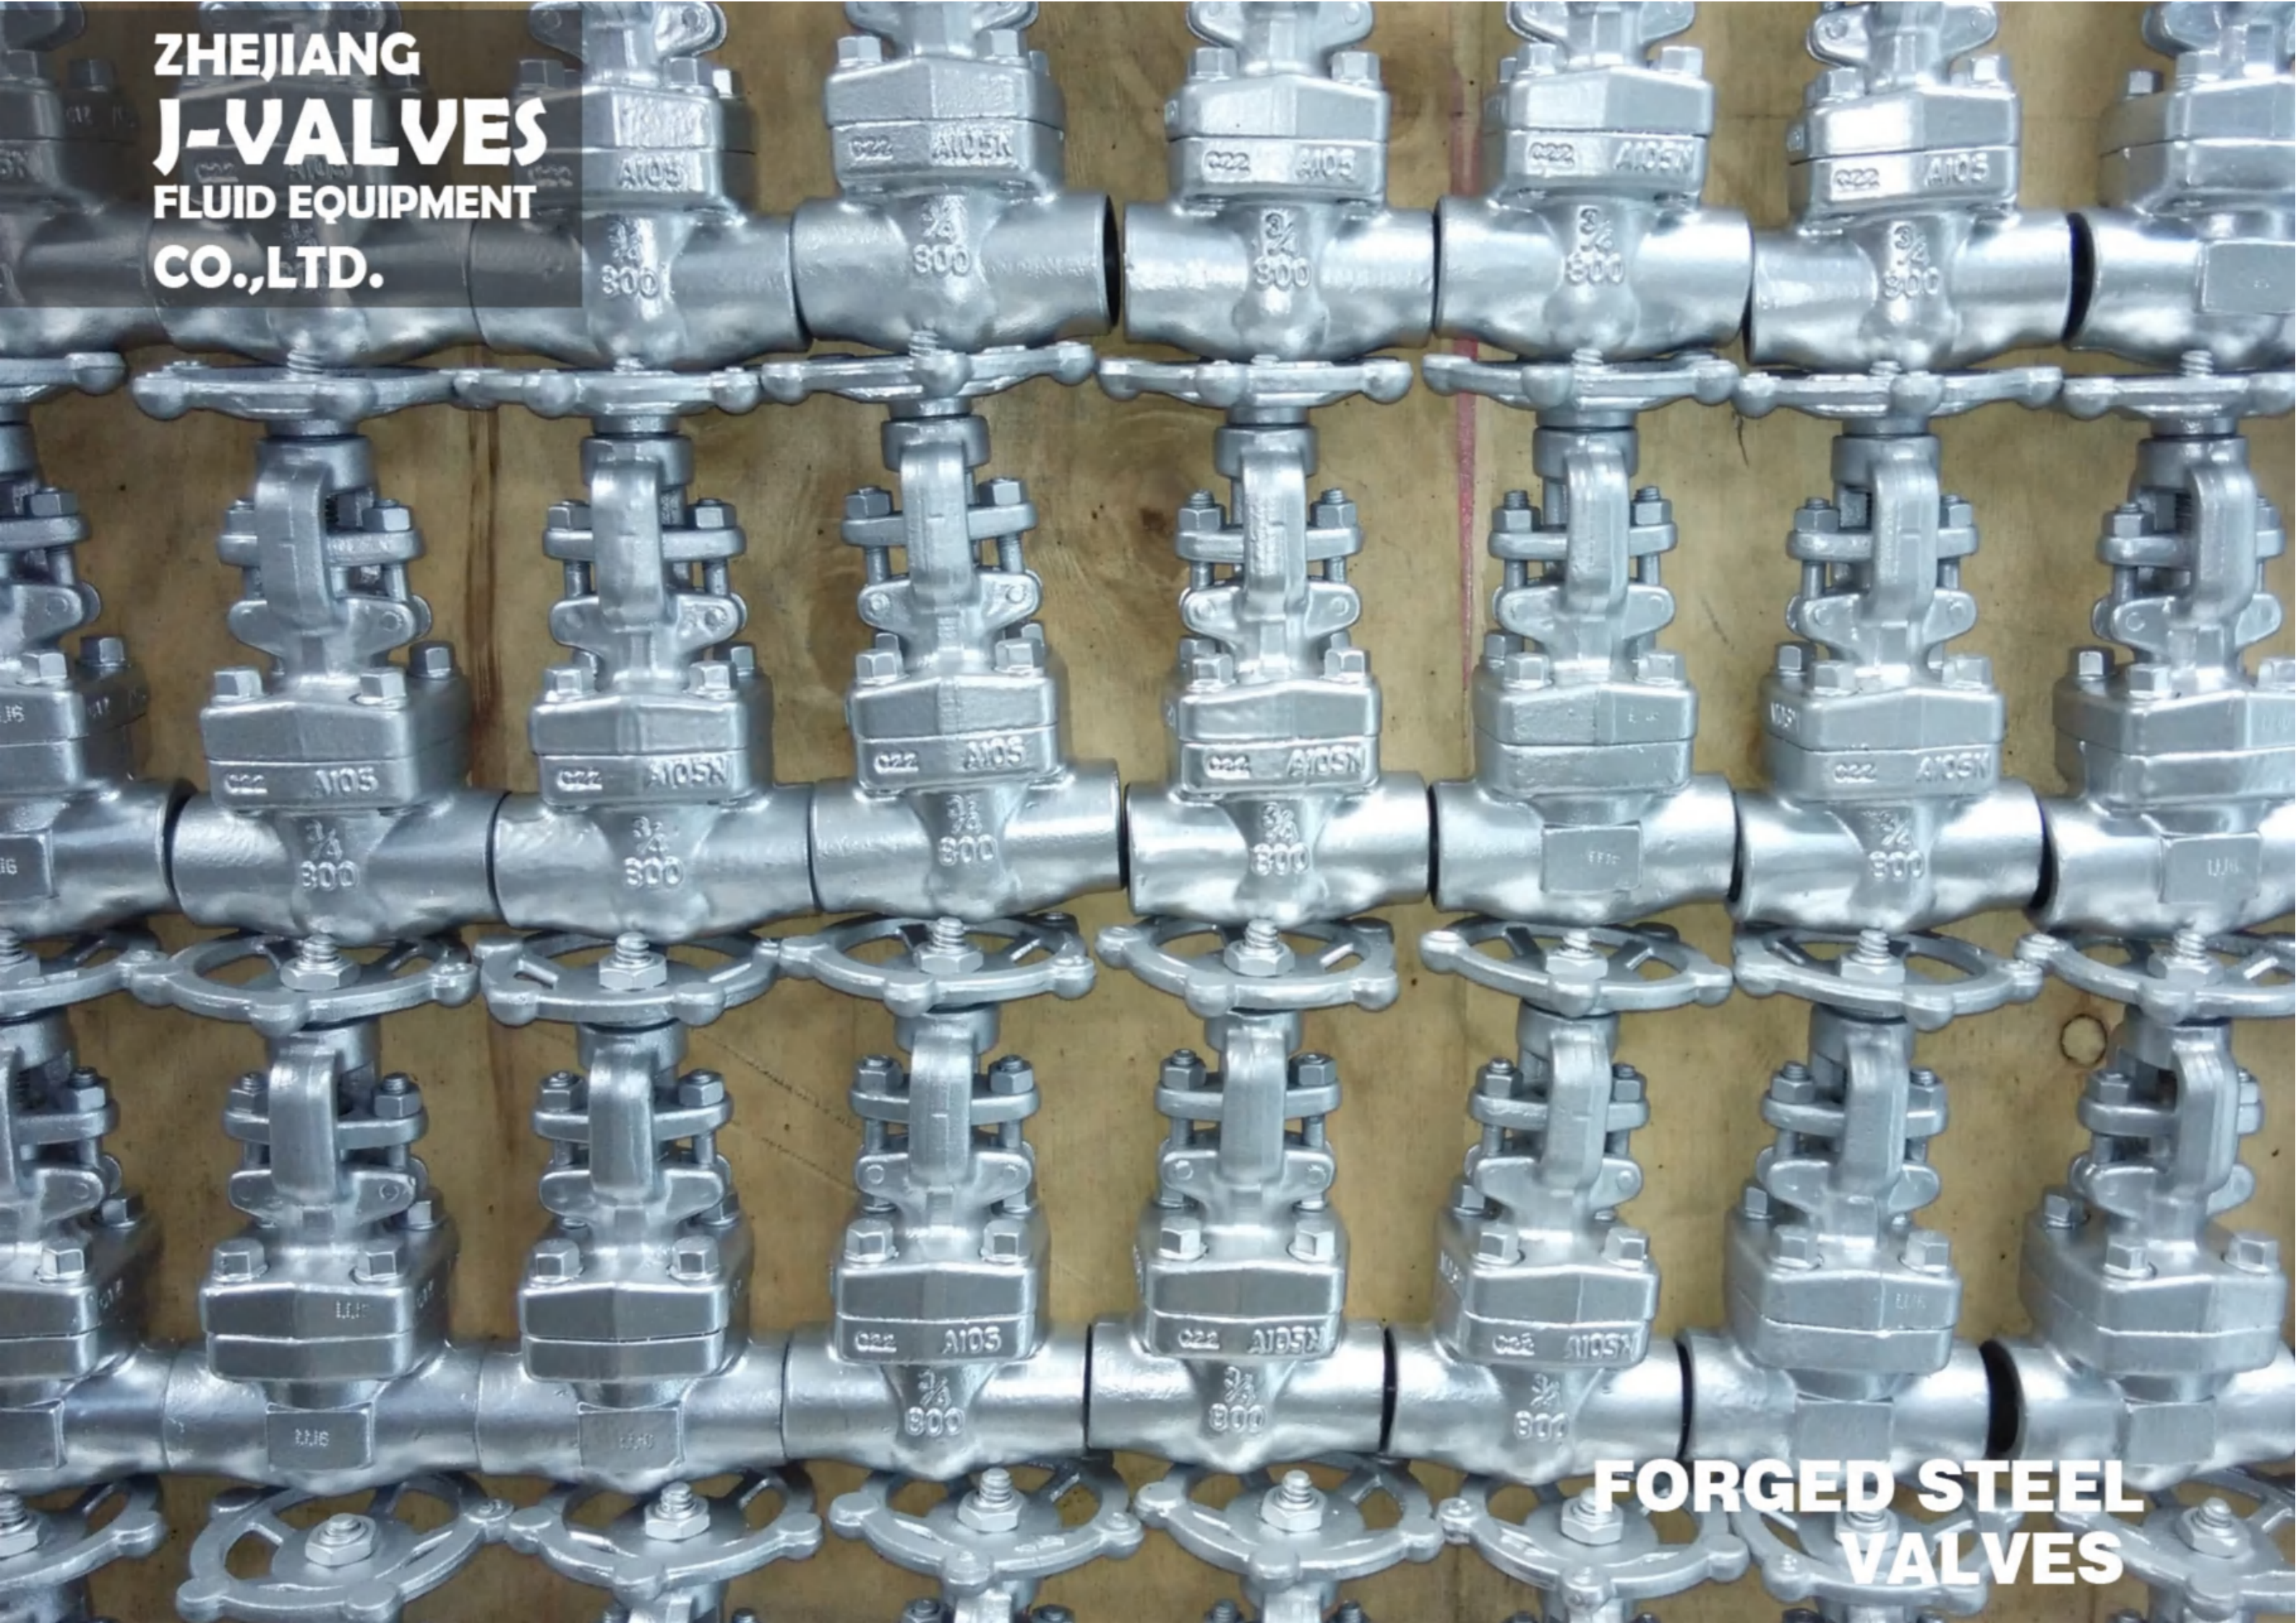

**FORGED STEEL
VALVES**

FORGED STEEL VALVES

GV-16

FORGED STEEL GATE VALVE THREAD/SW/BW TYPE



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Removable seat
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
End	THREAD/SW/BW	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	800Lb~1500Lb

GL-16

FORGED STEEL GLOBE VALVE THREAD/SW/BW TYPE



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Can Choose Globe Check
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
End	THREAD/SW/BW	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	800Lb~1500Lb

FORGED STEEL VALVES

GV-18

FORGED STEEL INTEGRAL FLANGE GATE VALVE



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Removable seat
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-17

FORGED STEEL INTEGRAL FLANGE GLOBE VALVE



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Can Choose Globe Check
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-18

FORGED STEEL SWING CHECK VALVE THREAD/SW/BW TYPE



Design Feature

- Integral Forging
- Unidirectional Flow
- Prevent Backflow
- Removable seat
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
End	THREAD/SW/BW	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	800Lb~1500Lb

CV-19

FORGED STEEL LIFT CHECK VALVE THREAD/SW/BW TYPE



Design Feature

- Integral Forging
- Unidirectional Flow
- Prevent Backflow
- Piston Or Spring
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
End	THREAD/SW/BW	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	800Lb~1500Lb

CV-20

FORGED STEEL INTEGRAL FLANGE SWING CHECK VALVE



Design Feature

- Integral Forging
- Unidirectional Flow
- Prevent Backflow
- Removable seat
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-21

FORGED STEEL INTEGRAL FLANGE LIFT CHECK VALVE



Design Feature

- Integral Forging
- Unidirectional Flow
- Prevent Backflow
- Piston Or Spring
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

ST-08

FORGED STEEL Y STRAINER THREAD/SW/BW TYPE



Design Feature

- Integral Forging
- Unidirectional Flow
- Solid Separation
- Stainless steel Filter
- Bolted Bonnet
- Sewage Design

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
End	THREAD/SW/BW	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	800Lb~1500Lb

GV-17

FORGED STEEL BELLOWS GATE VALVE THREAD/SW/BW TYPE



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Removable seat
- Bolted Bonnet
- Bellows Design

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
End	THREAD/SW/BW	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	800Lb~1500Lb

ST-09

FORGED STEEL INTEGRAL FLANGE Y TYPE STRAINER



Design Feature

- Integral Forging
- Unidirectional Flow
- Solid Separation
- Stainless steel Filter
- Bolted Bonnet
- Sewage Design

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GV-19

FORGED STEEL BELLOW INTEGRAL FLANGE GATE VALVE



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Removable seat
- Bolted Bonnet
- Bellows Design

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

FORGED STEEL VALVES

GV-20

FORGED STEEL WELDED FLANGE GATE VALVE



Design Feature

- Welding Flange
- Rising Stem
- Solid Disc
- Removable seat
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-18

FORGED STEEL WELDED FLANGE GLOBE VALVE



Design Feature

- Welding Flange
- Rising Stem
- Solid Disc
- Can Choose Globe Check
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

FORGED STEEL VALVES

GV-23

PRESSURE SEALED GATE VALVE THREAD/SW/BW



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Can Choose Globe Check
- Pressure Seal
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900~2500Lb

GV-24

PRESSURE SEALED FLANGE GATE VALVE



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Can Choose Globe Check
- Pressure Seal
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900~2500Lb

CV-22

FORGED STEEL WELDED FLANGE SWING CHECK VALVE



Design Feature

- Integral Forging
- Unidirectional Flow
- Prevent Backflow
- Removable seat
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

CV-23

FORGED STEEL WELDED FLANGE LIFT CHECK VALVE



Design Feature

- Integral Forging
- Unidirectional Flow
- Prevent Backflow
- Piston Or Spring
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~1500Lb

GL-23

PRESSURE SEALED GLOBE VALVE THREAD/SW/BW



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Can Choose Globe Check
- Pressure Seal
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900~2500Lb

GL-24

PRESSURE SEALED FLANGE GLOBE VALVE



Design Feature

- Integral Forging
- Rising Stem
- Solid Disc
- Can Choose Globe Check
- Pressure Seal
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900~2500Lb

ST-10

FORGED STEEL WELDED FLANGE STRAINER



GL-19/GL-20

INTEGRAL/WELDED FLANGE Y GLOBE VALVE



CV-24/CV-25

INTEGRAL/WELDED FLANGE Y CHECK VALVE



CV-26

Y TYPE CHECK VALVE THREAD/SW/BW



GV-21/GL-21

LOW TEMPERATURE GATE/GLOBE VALVE



GV-22/GL-22/CV-27/ST

CUSTOM VALVES



CV-26/CV-27

PRESSURE SEALED SWING/LIFT CHECK VALVE THREAD/SW/BW



Design Feature

- Integral Forging
- Unidirectional Flow
- Prevent Backflow
- SWING/Piston Or Spring
- Pressure Seal
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900~2500Lb

CV-28/CV-29

PRESSURE SEALED FLANGE SWING/LIFT CHECK VALVE



Design Feature

- Integral Forging
- Unidirectional Flow
- Prevent Backflow
- SWING/Piston Or Spring
- Pressure Seal
- API6FA Fire Safe

Size	1/2"~2"	Body	A105N/F304/F316
Desig	API602	Disc	A105N/F304/F316
Flange	ASME B16.5	Stem	F6a/F304/F316
Face to Face	ASME B16.10	Seat	13Cr/SS/STL
Testing	API598	W.T	-27~425℃
Remarks		W.P	900~2500Lb



CAST STEEL STRAINER

ST-01

CAST STEEL Y TYPE FLANGE STRAINER



Design Feature

- Precision Casting
- Unidirectional Flow
- Solid Separation
- Stainless steel Filter
- Bolted Bonnet
- Sewage Design

Size	1/2"~48"	Body	WCB/CF8/CF8M
Desig	ASME B16.34	Filter	SS304/SS316
Flange	ASME B16.5	Trim	SS304/SS316
Face to Face	ASME B16.10	Mesh	2.5~400
Testing	API598	W.T	-27~425 °C
Remarks		W.P	150Lb~2500Lb

ST-02

CAST STEEL Y TYPE BW STRAINER



Design Feature

- Precision Casting
- Unidirectional Flow
- Solid Separation
- Stainless steel Filter
- Bolted Bonnet
- Sewage Design

Size	1/2"~48"	Body	WCB/CF8/CF8M
Desig	ASME B16.34	Filter	SS304/SS316
Flange	ASME B16.5	Trim	SS304/SS316
Face to Face	ASME B16.10	Mesh	2.5~400
Testing	API598	W.T	-27~425 °C
Remarks		W.P	150Lb~2500Lb

ST-03

DIN CAST STEEL FALNGE Y TYPE STRAINER



Design Feature

- Precision Casting
- Unidirectional Flow
- Solid Separation
- Stainless steel Filter
- Bolted Bonnet
- Sewage Design

Size	1/2"~48"	Body	WCB/CF8/CF8M
Desig	ASME B16.34	Filter	SS304/SS316
Flange	ASME B16.5	Trim	SS304/SS316
Face to Face	ASME B16.10	Mesh	2.5~400
Testing	API598	W.T	-27~425 °C
Remarks		W.P	150Lb~2500Lb

ST-04

BASKET STRAINER



Design Feature

- Welded Body
- Unidirectional Flow
- Solid Separation
- Stainless steel Filter
- Bolted Bonnet
- Sewage Design

Size	1/2"~48"	Body	Q235/SS304/SS316
Desig	ASME B16.34	Filter	SS304/SS316
Flange	ASME B16.5	Trim	SS304/SS316
Face to Face	ASME B16.10	Mesh	2.5~400
Testing	API598	W.T	-27~425 °C
Remarks		W.P	150Lb~2500Lb

ST-05

T TYPE STRAINER



Design Feature

- Welded Body
- Unidirectional Flow
- Solid Separation
- Stainless steel Filter
- Bolted Bonnet
- Sewage Design

Size	1/2"~48"	Body	Q235/SS304/SS316
Desig	ASME B16.34	Filter	SS304/SS316
Flange	ASME B16.5	Trim	SS304/SS316
Face to Face	ASME B16.10	Mesh	2.5~400
Testing	API598	W.T	-27~425 °C
Remarks		W.P	150Lb~2500Lb

ST-06

DUPLEX STRAINER



Design Feature

- Welded Body
- Unidirectional Flow
- Solid Separation
- Stainless steel Filter
- Bolted Bonnet
- Sewage Design

Size	1/2"~48"	Body	Q235/SS304/SS316
Desig	ASME B16.34	Filter	SS304/SS316
Flange	ASME B16.5	Trim	SS304/SS316
Face to Face	ASME B16.10	Mesh	2.5~400
Testing	API598	W.T	-27~425 °C
Remarks		W.P	150Lb~2500Lb

STRAINER

**ZHEJIANG
J-VALVES
FLUID EQUIPMENT
CO.,LTD.**



**CAST STEEL
BUTTERFLY VALVES**

CAST STEEL BUTTERFLY VALVE

BT-01

TRIPLE ECCENTRIC FLANGE BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- High Temperature
- No residue design
- API607/API6FA Fire Safe

Size	2"~88"	Body	WCB/CF8/CF8M
Desig	API609	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	13Cr/SS304/SS316
Face to Face	ASME B16.10	Seat	Soft Seal and Metal Seal
Testing	API598	W.T	-27~150~425℃
Remarks		W.P	150Lb~300Lb

BT-02

TRIPLE ECCENTRIC WAFER BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- High Temperature
- No residue design
- API607/API6FA Fire Safe

Size	2"~88"	Body	WCB/CF8/CF8M
Desig	API609	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	13Cr/SS304/SS316
Face to Face	ASME B16.10	Seat	Soft Seal and Metal Seal
Testing	API598	W.T	-27~150~425℃
Remarks		W.P	150Lb~300Lb

CAST STEEL BUTTERFLY VALVE

BT-07

TRIPLE ECCENTRIC BW TYPE BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- High Temperature
- No residue design
- API607/API6FA Fire Safe

Size	2"~88"	Body	WCB/CF8/CF8M
Desig	API609	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	13Cr/SS304/SS316
Face to Face	ASME B16.10	Seat	Soft Seal and Metal Seal
Testing	API598	W.T	-27~150~425℃
Remarks		W.P	150Lb~300Lb

BT-08

HIGH TEMPERATURE BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- High Temperature
- No residue design
- API607/API6FA Fire Safe

Size	2"~88"	Body	WCB/CF8/CF8M
Desig	API609	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	13Cr/SS304/SS316
Face to Face	ASME B16.10	Seat	SS304/SS316
Testing	API598	W.T	-27~425℃
Remarks		W.P	150Lb~300Lb

BT-03

TRIPLE ECCENTRIC LUG TYPE BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- High Temperature
- No residue design
- API607/API6FA Fire Safe

Size	2"~88"	Body	WCB/CF8/CF8M
Desig	API609	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	13Cr/SS304/SS316
Face to Face	ASME B16.10	Seat	Soft Seal and Metal Seal
Testing	API598	W.T	-27~150~425℃
Remarks		W.P	150Lb~300Lb

BT-04

HIGH PERFORMANCE FLANGE TYPE BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- Double eccentric design
- No residue design
- API607 Fire Safe

Size	2"~88"	Body	WCB/CF8/CF8M
Desig	API609	Disc	WCB/CF8/CF8M
BW	ASME B16.25	Stem	13Cr/SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BT-09

DOUBLE DISC BUTTERFLY VALVE(AIR SEAL)

Design Feature

- Welded body
- Double Disc
- Air Pressure Seal
- High Temperature
- Applicable Gas Medium
- Pneumatic Or Electric Operation

Size	4"~152"	Body	CS/SS304/SS316
Desig	API609	Disc	CS/SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	SS/STL/Monel
Testing	API598	W.T	-27~550℃
Remarks		W.P	0.1~2MPa

BT-10

SOFT SEAL CENTERLINE FLANGE BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Soft Seal
- Locking Handle
- ISO 5211 Direct Mounting PAD
- No residue design

Size	2"~34"	Body	Cl/WCB/CF8/CF8M
Desig	API609	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	EPDM/NBR/PTFE
Testing	API598	W.T	-27~80~150℃
Remarks		W.P	150Lb /PN16/JIS10K

BT-05

HIGH PERFORMANCE WAFER BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- Double eccentric design
- No residue design
- API607 Fire Safe

Size	2"~88"	Body	WCB/CF8/CF8M
Desig	API609	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	13Cr/SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BT-06

HIGH PERFORMANCE LUG TYPE BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- Double eccentric design
- No residue design
- API607 Fire Safe

Size	2"~88"	Body	WCB/CF8/CF8M
Desig	API609	Disc	WCB/CF8/CF8M
Flange	ASME B16.5	Stem	13Cr/SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BT-11

SOFT SEAL CENTERLINE WAFER BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Soft Seal
- Locking Handle
- ISO 5211 Direct Mounting PAD
- No residue design

Size	2"~34"	Body	Cl/WCB/CF8/CF8M
Desig	API609	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	EPDM/NBR/PTFE
Testing	API598	W.T	-27~80~150℃
Remarks		W.P	150Lb /PN16/JIS10K

BT-12

SOFT SEAL CENTERLINE LUG TYPE BUTTERFLY VALVE






Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Soft Seal
- Locking Handle
- ISO 5211 Direct Mounting PAD
- No residue design

Size	2"~34"	Body	Cl/WCB/CF8/CF8M
Desig	API609	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	EPDM/NBR/PTFE
Testing	API598	W.T	-27~80~150℃
Remarks		W.P	150Lb /PN16/JIS10K

**ZHEJIANG
J-VALVES
FLUID EQUIPMENT
CO.,LTD.**

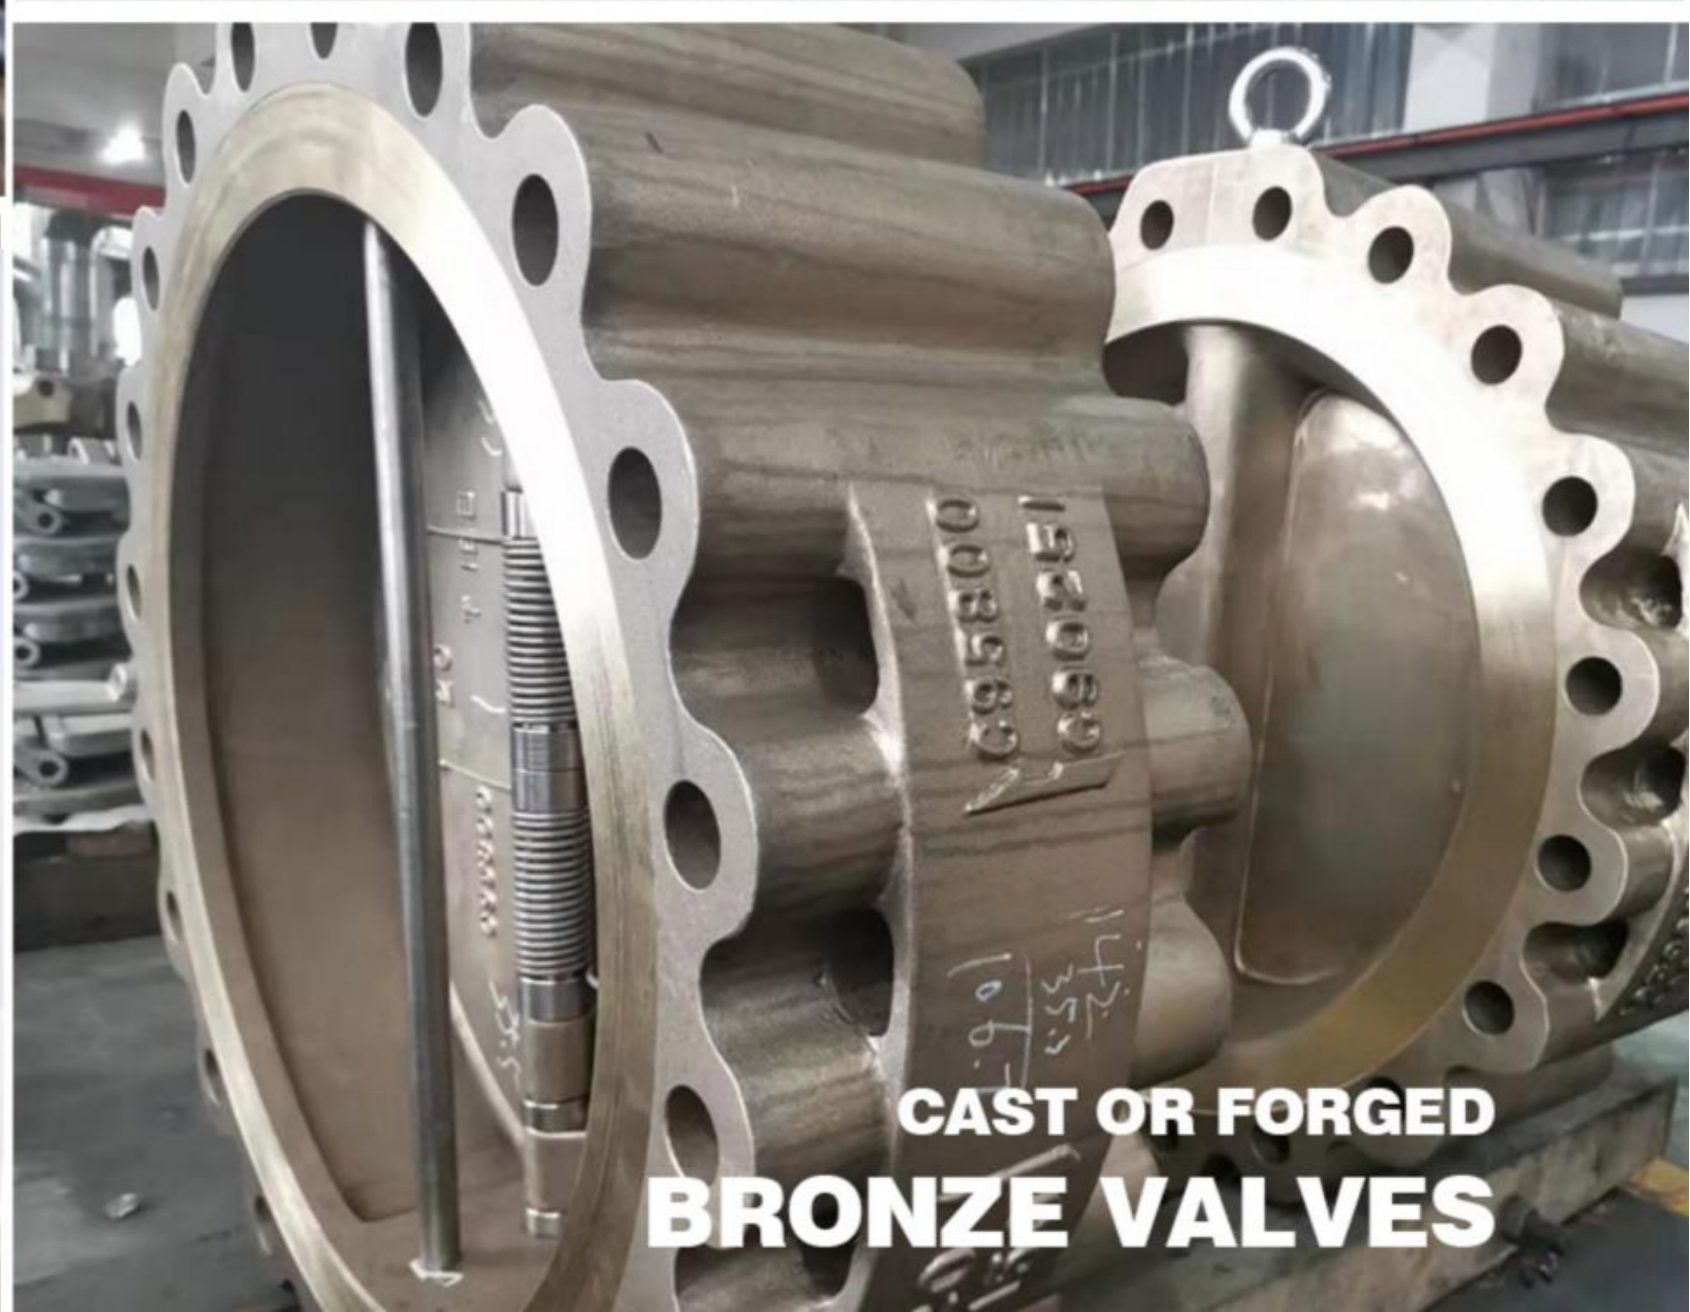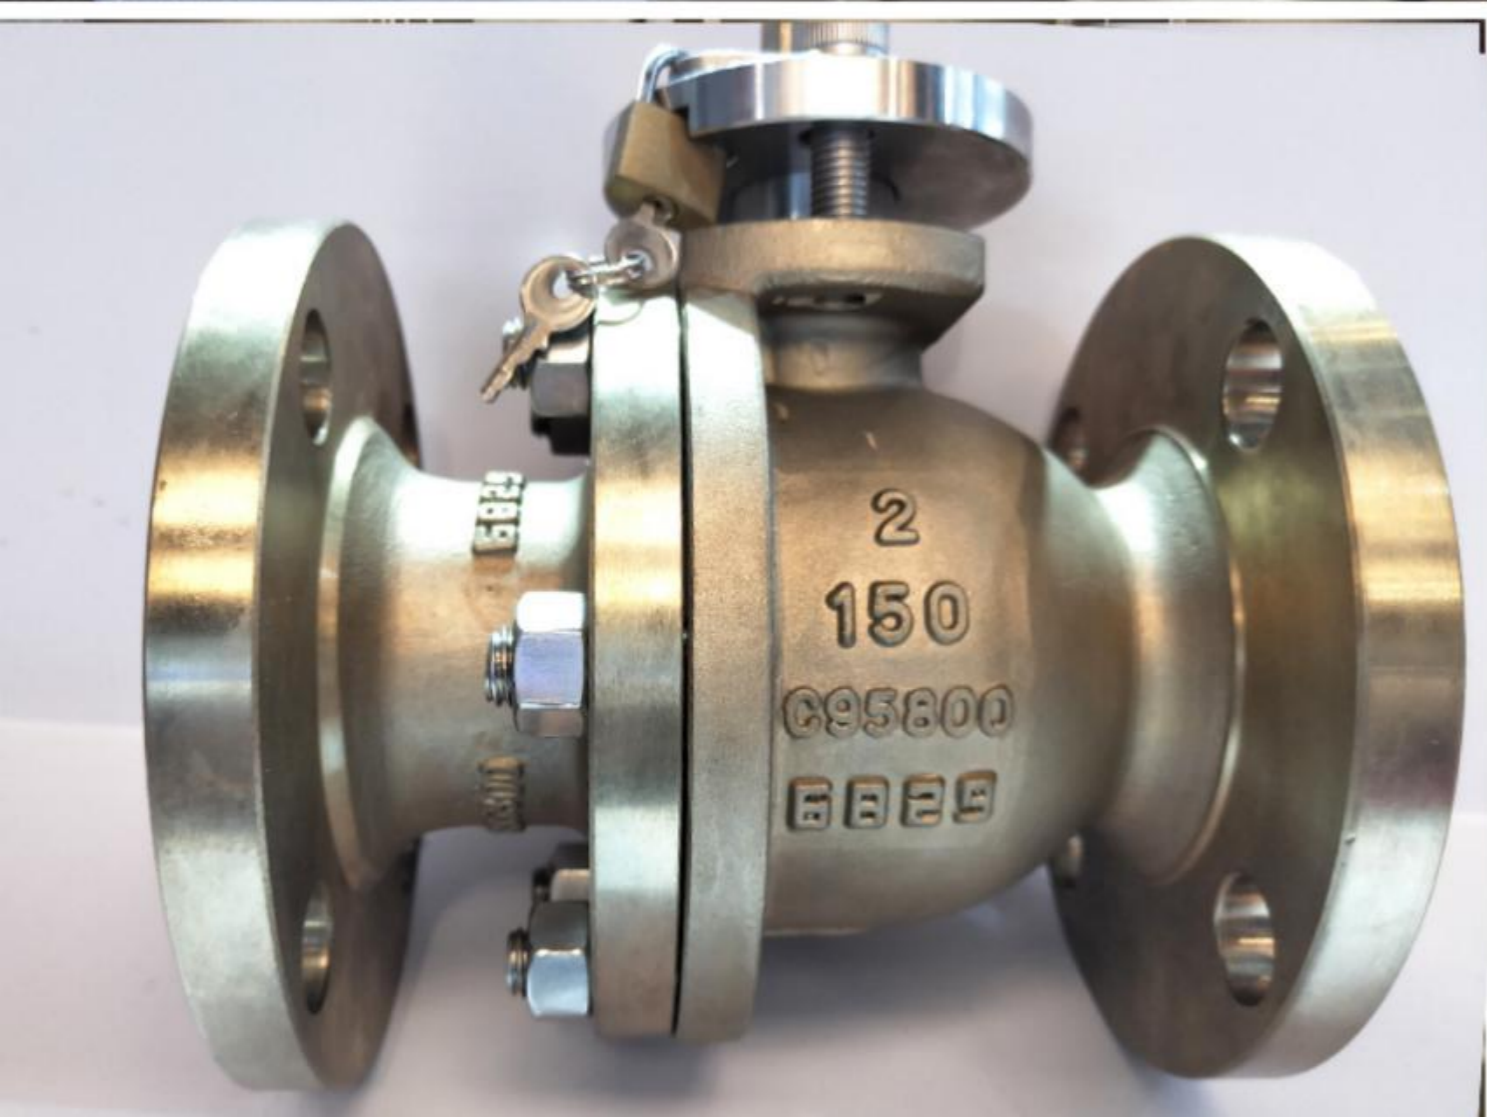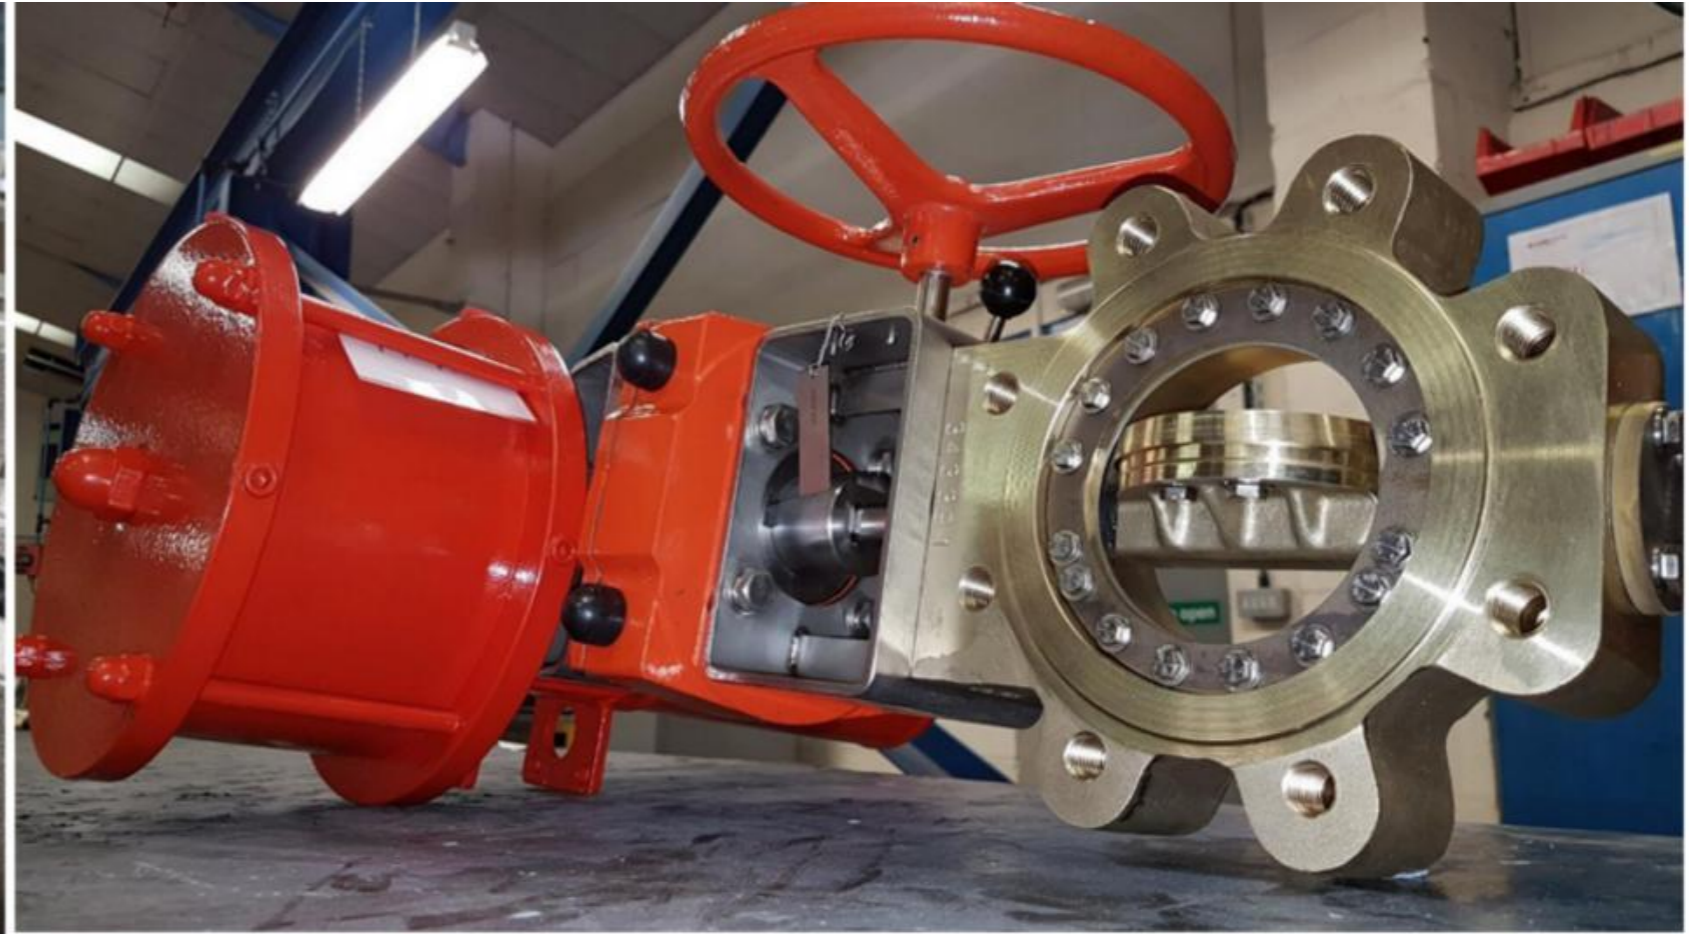

**CAST OR FORGED
BRONZE VALVES**

BRONZE VALVE

BV-29

BRONZE FLOATING FLANGE BALL VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-30

BRONZE TRONNION FLANGE BALL VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BRONZE VALVE

CV-15

BRONZE DOUBLE FLAP WAFFER TYPE CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Spring Seal
- Integral Body
- Can Choose Soft Seal

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BT-13

BRONZE TRIPLE ECCENTRIC FLANGE BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- High Temperature
- No residue design
- API607/API6FA Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

GV-13

BRONZE FLANGE GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

GL-13

BRONZE FLANGE GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BT-14

BRONZE TRIPLE ECCENTRIC WAFFER BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- High Temperature
- No residue design
- API607/API6FA Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BT-15

BRONZE TRIPLE ECCENTRIC LUG BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- High Temperature
- No residue design
- API607/API6FA Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

CV-13

BRONZE FLANGE SWING CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

CV-14

BRONZE DOUBLE FLAP LUG TYPE CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Spring Seal
- Integral Body
- Can Choose Soft Seal

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

BV-31

BRONZE 2PC BALL VALVE THREAD TYPE



BV-32

BRONZE 3PC BALL VALVE THREAD TYPE



GV-14

BRONZE THRED TYPE GATE VALVE



GL-14

BRONZE THRED TYPE GLOBE VALVE



CV-16

BRONZE THRED TYPE SWING CHECK VALVE



ST-07

BRONZE THRED TYPE STRAINER





**SPECIAL MATERIAL
INDUSTRIAL VALVES**

SPECIAL MATERIAL VALVES

BV-32

TITANIUM ALLOY BALL VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

GV-15

TITANIUM ALLOY GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Flexible Disc
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

GL-15

TITANIUM ALLOY GLOBE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Can Choose Globe Check
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

CV-17

TITANIUM ALLOY CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Prevent Backflow
- Full Bore
- Bolted Bonnet
- API6FA Fire Safe

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

METAL



MONEL 400, NICKEL-IRON-CHROMIUM ALLOY, INCONEL, SPECIAL STEEL, DUPLEX STEEL, SPECIAL STAINLESS STEEL, DUPLEX STAINLESS STEEL, 309 STAINLESS STEEL, 310 STAINLESS STEEL, INCOLOL, HASTELLOY, MONEL 400, HIGH NICKEL ALLOY, NICKEL-BASED ALLOYS, HIGH-TEMPERATURE ALLOYS, CORROSION-RESISTANT ALLOYS, SPECIAL STAINLESS STEELS, 310, 309, 347, 625, F309, F310, F347, F51, F53, F55, 347H, 2205, 2507, 309H, C-276, S32760, MONEL400, INCONEL625, TITANIUM, TITANIUM ALLOY, ZIRCONIUM, ZIRCONIUM ALLOY, NICKEL, NICKEL ALLOY, MONEL ALLOY, NICKEL ALUMINUM BRONZE, 904L



INDUSTRIAL VALVES

OTHER VALVES

PV-01

SLEEVE TYPE SOFT SEALING PLUG VALVE



Design Feature

- Precision casting
- Blow-Out Proof Stem
- Full Bore
- Locking Handle
- SOFT SEALING
- API607 Fire Safe

Size	1/2"~12"	Body	WCB/CF8/CF8M
Desig	API6D/API599	Disc	CF8/CF8M
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~600Lb

PV-02

INVERTED PRESSURE BALANCE LUBRICATED PLUG VALVE



Design Feature

- Precision casting
- Blow-Out Proof Stem
- Full Bore
- Locking Handle
- Grease Seal
- API607 Fire Safe

Size	1/2"~30"	Body	WCB/CF8/CF8M
Desig	API6D/API599	Disc	CF8/CF8M
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	SS304/SS316/STL
Testing	API598	W.T	-27~150~300℃
Remarks		W.P	150Lb~1500Lb

KG-01

KNIFE GATE VALVE WAFER TYPE



Design Feature

- Precision casting
- Rising Stem
- Bolted Bonnet
- Soft Seal Or Metal Seal
- ISO 5211 Direct Mounting PAD
- Full Bore

Size	2"~64"	Body	WCB/CF8/CF8M
Desig	ASME B16.34	Disc	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	Soft Seal Or Metal Seal
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb

KG-02

KNIFE GATE VALVE FLANGE TYPE



Design Feature

- Precision casting
- Rising Stem
- Bolted Bonnet
- Soft Seal Or Metal Seal
- ISO 5211 Direct Mounting PAD
- Full Bore

Size	2"~64"	Body	WCB/CF8/CF8M
Desig	ASME B16.34	Disc	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	Soft Seal Or Metal Seal
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb

CV-30

BALL CHECK VALVE FLANGE TYPE



Design Feature

- Precision casting
- Unidirectional Flow
- Prevent Backflow
- Bolted Bonnet
- Ball Seal
- Buoyancy Seal

Size	1/2"~24"	Body	WCB/CF8/CF8M
Desig	ASME B16.34	Ball	A105/SS304/SS316
Flange	ASME B16.5	/	/
Face to Face	ASME B16.10	Seat	EPDM/NBR
Testing	API598	W.T	-27~150℃
Remarks		W.P	150LB

SV-01

SAFETY VALVE



Design Feature

- Precision casting
- Automatic Opening And Closing
- Safety Protection
- Spring Design
- Reduced Bore
- Can Be Operated Manually

Size	1/2"~10"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PPL
Testing	API598	W.T	-27~150~220℃
Remarks		W.P	150Lb~300Lb

CONTROL VALVE

BV-33

PNEUMATIC BALL VALVE



Design Feature

- Precision casting
- Blow-Out Proof Stem
- Anti-Static Device
- Double Acting Or Single Acting
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~24"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PEEK
Testing	API598	W.T	-27~150℃
Remarks		W.P	150Lb~2500Lb

BV-34

ELECTRIC BALL VALVE



Design Feature

- Precision casting
- Blow-Out Proof Stem
- Anti-Static Device
- Locking Handle
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1/2"~24"	Body	WCB/CF8/CF8M
Desig	API608/API6D	Ball	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	PTFE/RPTFE/PEEK
Testing	API598	W.T	-27~150℃
Remarks		W.P	150Lb~2500Lb

BT-17

PNEUMATIC BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- ISO 5211 Direct Mounting PAD
- No residue design
- Double Acting Or Single Acting

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API609	Disc	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	SS304/SS316
Testing	API598	W.T	-27~150~425℃
Remarks		W.P	150Lb~300Lb

BT-18

ELECTRIC BUTTERFLY VALVE



Design Feature

- Precision Casting
- Blow-Out Proof Stem
- Renewable Seat
- ISO 5211 Direct Mounting PAD
- No residue design
- Voltage 220V/380V/440V

Size	2"~48"	Body	WCB/CF8/CF8M
Desig	API609	Disc	SS304/SS316
Flange	ASME B16.5	Stem	SS304/SS316
Face to Face	ASME B16.10	Seat	SS304/SS316
Testing	API598	W.T	-27~150~425℃
Remarks		W.P	150Lb~300Lb

GV-25

PNEUMATIC GATE VALVE



GV-26

ELECTRIC GATE VALVE



GL-25

PNEUMATIC GLOBE VALVE



GL-26

ELECTRIC GLOBE VALVE



KG-03

PNEUMATIC KNIFE GATE VALVE



KG-04

ELECTRIC KNIFE GATE VALVE





**API6A
VALVES**

API 6A VALVE

GV-27

API 6A GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Solid Disc
- Removable seat
- Bolted Bonnet
- Metal Seal

Size	1-13/16"~7-1/16"	Body	ANSI4130/SS304/SS316
Desig	API6A	Ball	ANSI4130/SS304/SS316
Flange	API6A	Stem	ANSI4130/SS304/SS316
Face to Face	API6A	Seat	ANSI4130/SS304/SS316
Testing	API6A	W.T	-60~121℃
Remarks		W.P	2000Psi~15000Psi

GL-27

API 6A SLAB GATE VALVE




Design Feature

- Precision Casting
- Rising Stem
- Solid Disc
- Removable seat
- Bolted Bonnet
- Metal Seal

Size	1-13/16"~7-1/16"	Body	ANSI4130/SS304/SS316
Desig	API6A	Ball	ANSI4130/SS304/SS316
Flange	API6A	Stem	ANSI4130/SS304/SS316
Face to Face	API6A	Seat	ANSI4130/SS304/SS316
Testing	API6A	W.T	-60~121℃
Remarks		W.P	2000Psi~15000Psi

CV-31

API 6A CHECK VALVE



Design Feature

- Precision Casting
- Unidirectional Flow
- Solid Disc
- Removable seat
- Bolted Bonnet
- Metal Seal

Size	1-13/16"~7-1/16"	Body	ANSI4130/SS304/SS316
Desig	API6A	Ball	ANSI4130/SS304/SS316
Flange	API6A	Stem	ANSI4130/SS304/SS316
Face to Face	API6A	Seat	ANSI4130/SS304/SS316
Testing	API6A	W.T	-60~121℃
Remarks		W.P	2000Psi~15000Psi

GL-28

API 6A THROTTLE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Solid Disc
- Removable seat
- Bolted Bonnet
- Metal Seal

Size	1-13/16"~7-1/16"	Body	ANSI4130/SS304/SS316
Desig	API6A	Ball	ANSI4130/SS304/SS316
Flange	API6A	Stem	ANSI4130/SS304/SS316
Face to Face	API6A	Seat	ANSI4130/SS304/SS316
Testing	API6A	W.T	-60~121℃
Remarks		W.P	2000Psi~15000Psi

BV-35

API 6A BALL VALVE



Design Feature

- Integral Forging
- Blow-Out Proof Stem
- Anti-Static Device
- 3PC Body
- ISO 5211 Direct Mounting PAD
- API607 Fire Safe

Size	1-13/16"~7-1/16"	Body	ANSI4130/SS304/SS316
Desig	API6A	Ball	ANSI4130/SS304/SS316
Flange	API6A	Stem	ANSI4130/SS304/SS316
Face to Face	API6A	Seat	DEVLON/PEEK
Testing	API6A	W.T	-60~121℃
Remarks		W.P	2000Psi~15000Psi

GV-28

API 6A MUD GATE VALVE



Design Feature

- Precision Casting
- Rising Stem
- Solid Disc
- Removable seat
- Bolted Bonnet
- Metal Seal

Size	1-13/16"~7-1/16"	Body	ANSI4130/SS304/SS316
Desig	API6A	Ball	ANSI4130/SS304/SS316
Flange	API6A	Stem	ANSI4130/SS304/SS316
Face to Face	API6A	Seat	ANSI4130/SS304/SS316
Testing	API6A	W.T	-60~121℃
Remarks		W.P	2000Psi~15000Psi

STAINLESS STEEL VALVE

<p>GV-29 STAINLESS STEEL THREAD GATE VALVE</p> 	<p>GL-29 STAINLESS STEEL THREAD GLOBE VALVE</p> 	<p>CV-32 STAINLESS STEEL THREAD SWING CHECK VALVE</p> 
<p>CV-33 2PC SPRING CHECK VALVE</p> 	<p>CV-34 WAFER SPRING CHECK VALVE</p> 	<p>CV-35 WAFER SWING CHECK VALVE</p> 
<p>CV-36 Y TYPE CHECK VALVE THREAD</p> 	<p>CV-37 3PC THREAD CHECK VALVE</p> 	<p>CV-38 THREAD TYPE FOOT VALVE</p> 
<p>ST-10 Y STRAINER THREAD TYPE</p> 	<p>BV-36 MINI BALL VALVE</p> 	<p>BV-37 STAINLESS STEEL FAUCET</p> 
<p>BV-38/BV-39 3PC SANITARY BALL VALVE CLAMP/BW</p> 	<p>BV-40 2PC SANITARY CLAMP BALL VALVE</p> 	<p>BT-19/BT-20 SANITARY BUTTERFLY VALV CLAMP/BW</p> 
<p>CV-39/CV-40 SANITARY CHECK VALV CLAMP/BW</p> 	<p>DV-01 DIAPHRAGM VALVE</p> 	<p>GL-30 PNEUMATIC ANGLE SEAT VALVE</p> 

VALVE ACCESSORIES

<p>FL-01 FLANGE</p> 	<p>BN-01 BOLT AND NUT</p> 	<p>SE-01 SEAT</p> 
<p>MG-01 METAL WOUND GASKET</p> 	<p>HW-01 HANDWHEEL</p> 	<p>HL-01 LEVER</p> 
<p>CV-36 Y TYPE CHECK VALVE THREAD</p> 	<p>CV-37 GEAR 90°</p> 	<p>CV-38 GEAR 360°</p> 
<p>ST-10 Y STRAINER THREAD TYPE</p> 	<p>BV-36 MINI BALL VALVE</p> 	<p>BV-37 STAINLESS STEEL FAUCET</p> 
<p>BV-38/BV-39 3PC SANITARY BALL VALVE CLAMP/BW</p> 	<p>BV-40 2PC SANITARY CLAMP BALL VALVE</p> 	<p>BT-19/BT-20 SANITARY BUTTERFLY VALV CLAMP/BW</p> 
<p>CV-39/CV-40 SANITARY CHECK VALV CLAMP/BW</p> 	<p>DV-01 DIAPHRAGM VALVE</p> 	<p>GL-30 PNEUMATIC ANGLE SEAT VALVE</p> 